FINAL SAMPLING REPORT WIIN GRANT LEAD TESTING PROGRAM

PRIME TIME HEAD START at THOMAS and WILSON

1111 Thomas Avenue, Monroe, Louisiana 71202 Ouachita Parish



Prepared for:

Caryn Benjamin LDH-OPH, Engineering Services 628 N. Fourth Street P.O. Box 4489 Baton Rouge, LA 70821



Prepared by:

Matrix New World Engineering, Land Surveying and Landscape Architecture, PC

2798 O'Neal Lane, Building F Baton Rouge, LA 70816 225.292.3271 matrixneworld.com wbe

MATRIX**NEWORLD** Engineering Progress

Date:

February 3, 2023

Matrix Project No.: 22-0097

TABLE OF CONTENTS

1.0 INTRODUCTION	1
1.1 Background	1
1.2 Purpose and Scope	2
1.3 Facility Information	2
2.0 ASSESSMENT ACTIVITIES AND SAMPLING PLA	N 3
2.1 Initial and On-site Interviews	3
2.2 Assessment Findings and Sampling Plan	3
3.0 SAMPLING EVENT	4
3.1 Procedures	4
3.2 Summary of Sampling Event	4
3.3 Laboratory Analysis	5
4.0 SAMPLE RESULTS	6
5.0 REMEDIATION AND RESAMPLING	7
6.0 OTHER RECOMMENDATIONS	8
6.1 Implement Routine Practices	8
6.2 Facility-Specific Recommendations	8
7.0 CONCLUSIONS	10
8.0 ADDITIONAL INFORMATION AND RESOURCES	11
9.0 SIGNATURES	12



TABLES

Table 4.1	Sample Results
Table 5.1	Fixtures over the lead action level (15 ppb)
Table 5.2	Fixtures over the program remediation trigger (10 ppb)
Table 6.1	Fixtures greater than 5 ppb
Table 6.2	Out-of-service/Out-of-use Fixtures

APPENDICES

Appendix A	Facility Map
Appendix B	ID Codes and Abbreviations
Appendix C	Fixture Identification Photo

ATTACHMENTS

Attachment 1	Analytical Laboratory Report
Attachment 2	Establishing Routine Practices



1.0 INTRODUCTION

On behalf of the Louisiana Department of Health (LDH), Matrix New World Engineering, Land Surveying and Landscape Architecture (Matrix) has prepared this Final Sampling Report (the Report) for Prime Time Head Start at Thomas and Wilson (the Facility). Matrix developed the Report following assessment and sampling of water sources used for consumption at the Facility to determine the potential presence and concentration of lead in drinking water.

This Report provides a summary of the activities performed by Matrix, the results of the analytical testing, and recommendations to the Facility as a result of the analytical results.

1.1 Background

Lead is a naturally occurring element with some beneficial uses, but it can be toxic to humans and animals. Lead can be found in the air, soil, water, and in other materials (e.g. paint, batteries). Lead was a common material used in plumbing materials for many years and can enter drinking water through corrosion. According to the Environmental Protection Agency (EPA), the most common sources of lead in drinking water are lead pipes, faucets, and fixtures. Lead service lines are more likely to be found in buildings built before 1986. Among buildings without lead pipes, the most common sources of lead in drinking water are brass or chrome-plated brass faucets and plumbing with lead solder (melted metal or alloy used to join pieces of metal). Additionally, some drinking water fountains with lead-lined tanks and other plumbing fixtures not intended for drinking water (e.g. hoses, spigots, hand washing sinks) may also be sources of lead in drinking water. The amount of lead that enters drinking water from these sources is affected by many factors, including: the chemistry of the water, the amount of lead the water is in contact with, the temperature of the water, the amount of wear in the pipes, how long water stays in the pipes, and the presence of protective scales or coatings inside the plumbing materials.

The Safe Drinking Water Act requires EPA to determine the level of contaminants in drinking water at which no adverse health effects are likely to occur with an adequate margin of safety. EPA has set the maximum contaminant level goal for lead in drinking water at zero because lead is a toxic metal that can be harmful to human health even at low exposure levels. EPA also set an action level for lead in drinking water at 15 parts per billion (ppb). Lead is persistent, and it can bioaccumulate in the body over time.

According to the Center for Disease Control and Prevention (CDC) and the EPA, young children, infants, and fetuses are particularly vulnerable to lead because the physical and behavioral effects of lead occur at lower exposure levels in children than in adults. In children, low levels of exposure have been linked to damage to the central and peripheral nervous system, learning disabilities, shorter stature, impaired hearing, and impaired formation and function of blood cells. The most important step in protecting children from these effects is preventing lead exposure before it occurs by removing lead hazards from their environment.

The EPA has determined even when water entering a facility meets all federal and state safe drinking water standards for lead, older plumbing materials in schools and child care facilities may contribute to elevated levels of lead in drinking water. Additionally, due to the intermittent water use patterns, schools and child care facilities are more likely to have a higher potential for lead to enter drinking water as water remains in contact with lead plumbing materials for longer. However, the only way to know if lead is present in drinking water is to test.



Engineering Progress

In order to help schools and child care facilities implement a voluntary program to reduce lead in drinking water, the EPA developed a guide for training, testing, and taking action called the 3Ts for Reducing Lead in Drinking Water in Schools and Child Care Facilities (the 3Ts). The 3Ts manual was revised in 2018 and provides information and resources to assist schools and child care facilities in identifying potential problems, implementing targeted remediation efforts, and communicating with parents, teachers, and the public. The EPA also developed a toolkit of resources to support the 3Ts. The 3Ts manual and toolkit can be found at https://www.epa.gov/ground-water-and-drinking-water.

The Water Infrastructure Improvements for the Nation Act or "WIIN Act" of 2016 authorized the EPA to award grants to states for providing voluntary testing for lead in drinking water at eligible schools and child care facilities. The LDH administers the WIIN Grant Lead Testing Program for Louisiana and offers free lead testing in drinking water at eligible schools and child care facilities. This program includes outreach and education on lead exposure risks in drinking water, facility assessments and water sampling, lead analysis, and remediation guidance in accordance with the 3Ts. Participation in the program is voluntary and requires that eligible schools and child care centers submit an application to LDH for approval. Once tested, schools and child care facilities are required to make the lead test results publicly available and notify parents and teachers/employees of the availability of the results.

1.2 Purpose and Scope

Matrix, as a contractor for LDH, assessed the sources of water used for consumption at the Facility and developed a Sampling Plan. A summary of the assessment activities and Sampling Plan is included in Section 2 below. The Sampling Plan was approved by LDH, and Matrix conducted sampling at the Facility in accordance with the EPA's 3Ts for Reducing Lead in Drinking Water in Schools and Child Care Facilities. A summary of the sampling event is included in Section 3 below. Upon receipt of the laboratory analytical report (**Attachment 1**), Matrix reviewed the results and was prepared to notify LDH and the Facility within 24 hours if any exceedances of the lead action level (15 ppb) were identified. Based on the results of the lead sampling and any other issues identified during the assessment or sampling activities, Matrix has developed recommendations and/or remediation guidance for the Facility as outlined in Sections 5 and 6.

1.3 Facility Information

Prime Time Head Start at Thomas and Wilson, a child care facility, is located at 1111 Thomas Avenue in Monroe, Ouachita Parish, Louisiana. The Facility is owned and operated by Louisiana Endowment for the Humanities. The Facility was built in 2004. The Facility consists of two buildings, Building 1 and Building 2, and serves children from three to five years of age. Children do not have access to Building 2 and it was not included in the assessment. For purposes of this Sampling Plan, all fixtures accessible to the children were assessed and sampled.

2.0 ASSESSMENT ACTIVITIES AND SAMPLING PLAN

Initial assessment and investigation of the Facility was performed on December 2, 2022, in accordance with the EPA's 3Ts for Reducing Lead in Drinking Water in Schools and Child Care Facilities. During the assessment, Matrix surveyed the Facility buildings to identify each potential source of water used for consumption. Based on fixture type, location, and use, Matrix determined which fixtures were appropriate to sample in accordance with the EPA and LDH guidance.

2.1 Initial and On-site Interviews

On December 2, 2022, Matrix staff met with Center Director Sha'Nel Moy. Information gathered during the initial interviews and discussions during the assessment includes the following:

- The Facility does not cook food and does not have a kitchen. Food is provided by a third party and is put on plates in the Facility's Food Prep Room (Room 110).
- The Facility fills portable insulated water jugs from the kitchen faucets and ice machine to provide drinking water for outside play.
- The water main enters Building 1 from the front near Room 103.

2.2 Assessment Findings and Sampling Plan

As a result of the assessment, Matrix identified 10 total fixtures that may be a source of water used for consumption by the students. Matrix did not identify any water coolers banned by EPA at the Facility. Each fixture was assigned a specific fixture ID using the following method:

(Building) - (Floor) – (Room # or Name) – (Fixture Type and Location)

A facility map indicating the fixture locations is included in **Appendix A**, and a list of codes and abbreviations used in the fixture and sample IDs is included in **Appendix B**.

After review of the fixture information, Matrix determined some fixtures were duplicates, not applicable to the program, and/or did not pose a risk of consumption. As a result of this evaluation, Matrix concluded 9 fixtures at the Facility should be sampled.

Matrix submitted the Sampling Plan to LDH on December 13, 2022, and it was approved by LDH on December 14, 2022.



3.0 SAMPLING EVENT

Following LDH's approval of the Sampling Plan, Matrix coordinated with facility representatives to schedule the sampling event. Matrix conducted sampling at the Facility on January 13, 2023, in accordance with the sampling guidance provided in the EPA's 3Ts for Reducing Lead in Drinking Water in Schools and Child Care Facilities and in guidance from LDH.

3.1 Procedures

Matrix ensured, through scheduling and communication with facility representatives, that the water was unused in the Facility's pipes/fixtures for a minimum of eight, but not more than eighteen hours prior to initiating sampling. Additionally, Matrix ensured that first-draw samples were collected before the facility opened and before any water was used at the Facility.

All samples were collected in a 250 milliliter (mL) wide-mouth bottle utilizing a two-step process*.

- Step 1- First Draw or Primary Samples (P) This sample was collected immediately after opening the faucet/valve without allowing any water to go to waste.
- Step 2- Flush Samples (F) This sample was collected after running (flushing) the water for 30 seconds.

* Only one sample was collected from the ice machine utilizing a gloved hand to place the ice into the sample bottle.

Matrix began the sampling event in the Facility's kitchen. All first draw and flush samples were collected in the kitchen prior to sampling any other areas of the facility. Following the kitchen samples, Matrix began collecting first draw samples of the other fixtures in the area closest to where the water main enters the facility and working away from that point. After first draw samples were collected, Matrix collected the flush samples utilizing the same pattern.

Matrix noted the time of each sample on the laboratory chain-of-custody forms included in **Attachment 1**. Sample bottles were packaged according to the sampling guidance.

3.2 Summary of Sampling Event

Matrix conducted sampling of the Facility on January 13, 2023. Matrix collected samples according to the approved Sampling Plan.

Matrix collected primary and flush samples were collected for 8 fixtures and one sample was collected for the ice machine. Each sample was identified using the fixture ID plus "P" or "F" for primary or flush.

(Building) - (Floor) – (Room # or Name) – (Fixture Type and Location) - (Primary/Flush)

A comprehensive list of the fixtures sampled and the sample results is included in Table 4.1. A facility map indicating the fixture locations is included in **Appendix A**.



3.3 Laboratory Analysis

Samples collected by Matrix were submitted to Waypoint Analytical (Waypoint). Waypoint is certified by the LDH Office of Public Health as a chemical laboratory/drinking water, a laboratory meeting the requirements contained within the laboratory certification regulations (LAC 48:V.Chapter 80). Waypoint analyzed the samples for lead using the EPA Method 200.8 and a Reporting Limit of 0.500 micrograms per liter (µg/L).



4.0 SAMPLE RESULTS

Matrix received the final laboratory analytical report on January 30, 2023. Matrix reviewed the results and determined a notification to the Facility and LDH within 24 hours was not required as none of the results exceeded the lead action level, 15 ppb (15 μ g/L). A summary of the results is included in Table 4.1 below. Discussions of recommended remediation are in Sections 5.0 and 6.0.

Sample results were reported by the lab in micrograms per liter (μ g/L) which is equivalent to parts per billion (ppb).

A facility map indicating the fixture locations is included in **Appendix A**, and a list of codes and abbreviations used in the fixture and sample IDs is included in **Appendix B**.

Fixture ID	Location	Fixture Type	Primary Sample (ppb)	Flush Sample (ppb)
1-1-Food110-IM	Food Prep Room 110	Ice Machine	<0.500	-
1-1-Food110-KF(1)	Food Prep Room 110	Faucet	0.723	<0.500
1-1-Food110-KF(3-L)	Food Prep Room 110	Faucet	2.72	<0.500
1-1-Food110-KF(3-R)	Food Prep Room 110	Faucet	7.16	<0.500
1-1-112-BF	Classroom 112 Bathroom	Faucet	<0.500	<0.500
1-1-115-BF	Classroom 115 Bathroom	Faucet	<0.500	<0.500
1-1-117-BF	Classroom 117 Bathroom	Faucet	<0.500	<0.500
1-1-119-BF	Classroom 119 Bathroom	Faucet	<0.500	<0.500
1-1-121-BF	Classroom 121 Bathroom	Faucet	1.68	<0.500

TABLE 4.1 SAMPLE RESULTS



5.0 REMEDIATION AND RESAMPLING

As indicated in Table 5.1 below, none of the samples collected from the fixtures at the Facility were greater than the lead action level, 15 ppb (15 μ g/L).

TABLE 5.1 Fixtures over the lead action level (15 ppb)

Photo No.	Fixture ID	Primary Sample (ppb)	Flush Sample (ppb)	Recommended Remediation	Follow-Up Sampling
				NONE	

As a condition of the WIIN Grant Program, each state's lead testing program was required to establish a program remediation trigger. LDH set a trigger of 10 ppb (10 μ g/L). As indicated in Table 5.2 below, none of the samples collected from the fixtures at the Facility were greater than the program remediation trigger, 10 ppb (10 μ g/L).

TABLE 5.2 Fixtures over the program remediation trigger (10 ppb)

Photo No.	Fixture ID	Primary Sample (ppb)	Flush Sample (ppb)	Recommended Remediation	Follow-Up Sampling
				NONE	

Note: Includes only fixtures with sample results greater than 10 ppb, but not greater than 15 ppb.

MATRIX**NEWORLD**

Engineering Progress

6.0 OTHER RECOMMENDATIONS

Although none of the fixtures sampled at the Facility are recommended for remediation or follow-up sampling, LDH encourages the facility to implement the practices outlined in the following sections to reduce exposure to elevated lead levels and other environmental hazards (e.g. bacteria).

6.1 Implement Routine Practices

Please be aware that there are many factors that contribute to lead levels in drinking water (i.e., plumbing materials, water temperature, water quality, frequency of water usage and stagnation, etc.). Because of this, lead levels may fluctuate over time. To reduce exposure to elevated lead levels and other drinking water contaminants, it is recommended that schools and child care facilities establish routine practices in accordance with Module 6 of the EPA 3Ts for Reducing Lead in Drinking Water Manual (see "Establishing Routine Practices" beginning on page 48, https://www.epa.gov/system/files/documents/2021-07/epa-3ts-guidance-document-english.pdf, or found in **Attachment 2**).

LDH encourages the Facility to implement the 3Ts Routine Practices for the fixture listed in Table 6.1 below. This fixture had a primary and/or flush sample result greater than 5 ppb, but not greater than the lead action level (15 ppb) or the program remediation trigger (10 ppb). **Appendix C** includes photo identification for the fixture listed in Table 6.1.

Photo No.	Fixture ID	Location	Fixture Type	Primary Sample (ppb)	Flush Sample (ppb)
1	1-1-Food110-KF(3-R)	Food Prep Room 110	Faucet	7.16	<0.500

Note: Includes only fixtures with sample results greater than 5 ppb, but not greater than 10 ppb.

6.2 Facility-Specific Recommendations

Out-of-Service/Out-of-Use Fixtures

At the time of assessment and sampling, the fixtures listed in Table 6.2 below were disconnected and outof-use. Prior to bringing these fixtures back into service, the Facility should follow the guidelines outlined in the 3Ts manual, including thoroughly flushing the fixtures.



TABLE 6.2 Out-of-service/Out-of-use Fixtures	

Fixture ID	Location	Fixture Type	Fixture Add-Ons	Notes
1-1-HAL(by112)-WC(L)	Hallway (by Classroom 112)	Water Cooler	None	High-low water cooler. Left bubbler. Not in use due to COVID. Disconnected. Elkay EZFSTL8_1H
1-1-HAL(by112)-WC(R)	Hallway (by Classroom 112)	Water Cooler	None	High-low water cooler. Right bubbler. Not in use due to COVID. Disconnected. Elkay EZFSTL8_1H
1-1-HAL(by115)-WC(L)	Hallway (by Classroom 115)	Water Cooler	None	High-low water cooler. Left bubbler. Not in use due to COVID. Disconnected. Elkay EZFSTL8_1H
1-1-HAL(by115)-WC(R)	Hallway (by Classroom 115)	Water Cooler	None	High-low water cooler. Right bubbler. Not in use due to COVID. Disconnected. Elkay EZFSTL8_1H



7.0 CONCLUSIONS

In accordance with EPA's 3Ts for Reducing Lead in Drinking Water in Schools and Child Care Facilities and under the direction of the Louisiana Department of Health, Matrix assessed and sampled the sources of drinking water used for consumption by the students at the Facility in order to determine the concentration of lead in drinking water. The Facility did not contain any banned fixtures, but several fixtures, particularly water coolers, were out of service during the assessment and sampling activities.

Matrix collected 17 water samples from 9 fixtures at the Facility which were analyzed according to sampling guidelines. The Facility did not have any fixtures that exceeded the lead action level (15 ppb) or the Louisiana program remediation trigger (10 ppb).

However, given the physical and behavioral effects of lead and the vulnerability of young children to lead, LDH recommends the Facility implement routine practices as outlined in Module 6 of the 3Ts manual. The Facility should also follow the recommendations for out-of-service/out-of-use fixtures as outlined in Section 6.2 of this Report.

Through voluntary participation in the WIIN Grant Lead Testing Program, the Facility should now have a better understanding of the potential presence and concentration of lead in drinking water. The recommendations and resources included in this report provide the tools needed to take action and implement practices to reduce lead exposure through drinking water.



8.0 ADDITIONAL INFORMATION AND RESOURCES

The following links contain additional information and resources regarding lead in drinking water:

- EPA's 3Ts for Reducing Lead in Drinking Water <u>https://www.epa.gov/ground-water-and-drinking-water/3ts-reducing-lead-drinking-water</u>
- The 3Ts Revised Manual <u>https://www.epa.gov/system/files/documents/2021-07/epa-3ts-guidance-document-english.pdf</u>
- Learn About Lead https://www.epa.gov/lead/learn-about-lead
- Childhood Lead Poisoning Prevention Program https://www.cdc.gov/nceh/lead/
- Basic Information about Lead in Drinking Water https://www.epa.gov/ground-water-and-drinking-water
 water/basic-information-about-lead-drinking-water
- Lead in Drinking Water https://www.cdc.gov/nceh/lead/prevention/sources/water.htm

MATRIXNEWORLD

Engineering Progress

9.0 SIGNATURES

un

Dawn M. Brown Director of Waste Services Matrix New World Engineering

February 3, 2023

Date

Ginda M. McConnell

Linda M. McConnell, PE PE 20434 Louisiana Matrix New World Engineering

February 3, 2023

Date




APPENDIX A

FACILITY MAP

MATRIX**NEWORLD** Engineering Progress

Map 1 of 1



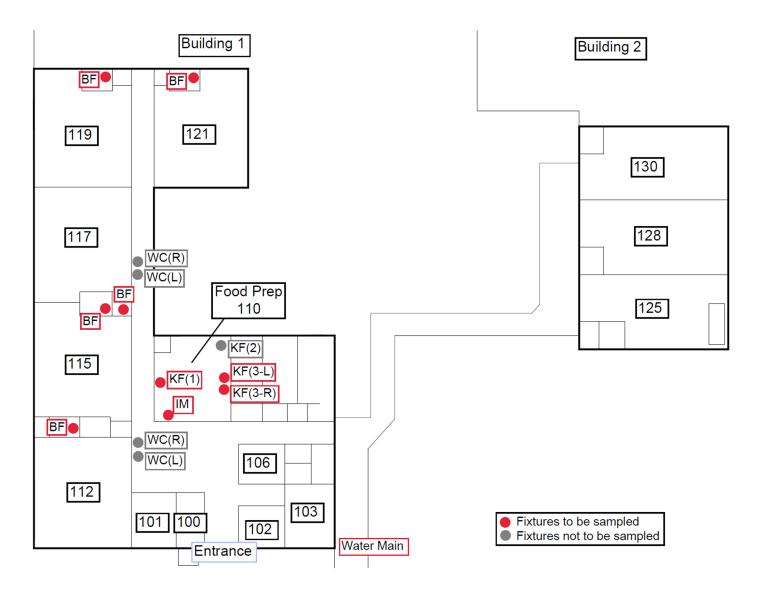



APPENDIX B

ID CODES AND ABBREVIATIONS

Fixture ID Naming

(Building) – (Floor) – (Room# or Name) – (Fixture Type and location) – (Primary or Flush)

Room Name Codes

Kitchen	KIT	Hallway	HAL	
Bathroom	BATH	Office	OFF	
Cafeteria	CAF	Exterior	EXT	
Locker room	LR	Teacher's Lounge	TEA	
Gymnasium	GYM	Entryway	ENT	
Nurse or Nursery	NUR	Concessions	CON	
Library	LIB			

Fixture Type Codes

Water Cooler Fountain	WC	Bubbler	BU
Faucet (not listed otherwise)	F	Sink Bubbler	SB
Classroom Faucet (sink)	CF	Kitchen Faucet (sink)	KF
Bathroom Faucet (sink)	BF	Nurse's Office Faucet/Sink	NF
Janitor Closet Faucet/Sink	JF	Kitchen Pot Filler	PF
Trough Faucet	TF	Shower Head	SH
Ice Machine	IM	Bottle Filler	BTL
Water Dispenser	WD	Portable Sink	PS

Fixture Location

Left	L	Middle Left	ML
Right	R	Middle Right	MR
Middle	Μ		

Primary or Flush

Primary- The first water to exit the fixture to fill the first sample bottle	Ρ
Flush- Sample following the 30 second flush	F



APPENDIX C

FIXTURE IDENTIFICATION PHOTO

MATRIX**NEWORLD** Engineering Progress





ATTACHMENT 1

ANALYTICAL LABORATORY REPORT



5041 Taravella Road, Marrero, LA 70072 Main 504-371-8557 ° Fax 504-371-8560 www.waypointanalytical.com

1/30/2023

Matrix New World Engineering Ms. Dawn Brown 2798 O'Neal Lane, Building F Baton Rouge, LA, 70818

Ref: Report Number: 23-013-0038 Project Description: Prime Time Head Start at Thomas and Wils

Dear Ms. Dawn Brown:

Waypoint Analytical Louisiana, Inc. received sample(s) on 1/16/2023 for the analyses presented in the following report. The above referenced project has been analyzed per your instructions. Unless otherwise noted, the analyses were performed in our laboratory in accordance with Standard Methods, The Solid Waste Manual SW-846, EPA Methods for Chemical Analysis of Water and Wastes and /or 40 CFR part 136.

Certain parameters (chlorine, pH, dissolved oxygen, sulfite...) are required to be analyzed within 15 minutes of sampling. Usually, but not always, any field parameter analyzed at the laboratory is outside of this holding time. Refer to sample analysis time for confirmation of holding time compliance. Analyses reported which indicate "Field" for these parameters were analyzed by the client in the field. Results for solid samples are reported on an as received or "wet weight" basis unless otherwise specified.

The analytical data has been validated using standard quality control measures performed as required by the analytical method. Quality Assurance, method validations, instrumentation maintenance and calibration for all parameters (NELAP and non-NELAP) were performed in accordance with guidelines established by the USEPA (including 40 CFR 136 Method Update Rule May 2021) and NELAC unless otherwise indicated. Any parameter for which the laboratory is not officially NELAP accredited is indicated by a '~' symbol. These are not included in the scope because NELAP accreditation is either not available or has not been applied for. Additional certifications may be held/are available for parameters, where NELAP accreditation is not required or applicable. A full list of certifications is available upon request.

All quality control measures undertaken in accordance with Waypoint Analytical Louisiana, Inc. CompQAP990807A and revisions under the terms of the Louisiana Environmental Laboratory Accreditation Program (Certificate #02041) are within acceptance ranges established in that document with the exception of the items indicated and/or discussed in a Case Narrative.

The results are shown on the attached analysis sheet(s). Be aware that the time analyzed for certain samples (e.g. - BOD, CBOD, etc.) refer to the time the sample batch was begun and not necessarily to the time an individual sample was begun. Thank you for allowing Waypoint Analytical Louisiana, Inc. to serve you. Should I be of further assistance, if you have any questions or need additional information please contact me or client services.

Sincerely,

Angegan

Amy Jackson Project Manager

Laboratory's liability in any claim relating to analyses performed shall be limited to, at laboratory's option, repeating the analysis in question at laboratory's expense, or the refund of the charges paid for performance of said analysis. This report may be reproduced in full only with the written permission of the laboratory and/or the entity to which it is addressed. Results contained herein relate only to the sample(s) submitted to the laboratory.





Certification Summary

Laboratory ID: WP MLA: Waypoint Analytical Louisiana, Inc., Marrero, LA

State	Program	Lab ID	Expiration Date
Georgia	State Program	02041	06/30/2023
Louisiana	State Program - NELAP	02041	06/30/2023

Laboratory ID: WP MTN: Waypoint Analytical, LLC., Memphis, TN

State	Program	Lab ID	Expiration Date
Alabama	State Program	40750	02/28/2023
Arkansas	State Program	88-0650	02/07/2023
California	State Program	2904	06/30/2023
Florida	State Program - NELAP	E871157	06/30/2023
Georgia	State Program	C044	02/18/2023
Georgia	State Program	04015	06/30/2023
Illinois	State Program - NELAP	200078	10/10/2023
Kentucky	State Program	80215	06/30/2023
Kentucky	State Program	KY90047	12/31/2023
Louisiana	State Program - NELAP	LA037	12/31/2023
Louisiana	State Program - NELAP	04015	06/30/2023
Mississippi	State Program	MS	02/11/2023
North Carolina	State Program	47701	07/31/2023
North Carolina	State Program	415	12/31/2023
Pennsylvania	State Program - NELAP	68-03195	05/31/2023
South Carolina	State Program	84002	06/30/2023
Tennessee	State Program	02027	11/14/2025
Texas	State Program - NELAP	T104704180	09/30/2023
Virginia	State Program	00106	06/30/2023
Virginia	State Program - NELAP	460181	09/14/2023



5041 Taravella Road, Marrero, LA 70072 Main 504-371-8557 ° Fax 504-371-8560 www.waypointanalytical.com

Sample Summary Table

Report Number: Client Project Description:

ption: Prime Time Head Start at Thomas and Wils

23-013-0038

Lab No	Client Sample ID	Matrix	Date Collected	Date Received	Method	Lab ID
83296	1-1-Food110-IM	Aqueous	01/13/2023 06:51	01/16/2023 12:30	EPA-200.8 (DW)	WP MTN
83297	1-1-Food110-KF(1)-P	Aqueous	01/13/2023 06:45	01/16/2023 12:30	EPA-200.8 (DW)	WP MTN
83298	1-1-Food110-KF(3-L)-P	Aqueous	01/13/2023 06:46	01/16/2023 12:30	EPA-200.8 (DW)	WP MTN
83299	1-1-Food110-KF(3-R)-P	Aqueous	01/13/2023 06:47	01/16/2023 12:30	EPA-200.8 (DW)	WP MTN
83300	1-1-112-BF-P	Aqueous	01/13/2023 06:48	01/16/2023 12:30	EPA-200.8 (DW)	WP MTN
83301	1-1-115-BF-P	Aqueous	01/13/2023 06:49	01/16/2023 12:30	EPA-200.8 (DW)	WP MTN
83302	1-1-117-BF-P	Aqueous	01/13/2023 06:52	01/16/2023 12:30	EPA-200.8 (DW)	WP MTN
83303	1-1-119-BF-P	Aqueous	01/13/2023 06:53	01/16/2023 12:30	EPA-200.8 (DW)	WP MTN
83304	1-1-121-BF-P	Aqueous	01/13/2023 06:54	01/16/2023 12:30	EPA-200.8 (DW)	WP MTN
83305	1-1-Food110-KF(1)-F	Aqueous	01/13/2023 06:46	01/16/2023 12:30	EPA-200.8 (DW)	WP MTN
83306	1-1-Food110-KF(3-L)-F	Aqueous	01/13/2023 06:47	01/16/2023 12:30	EPA-200.8 (DW)	WP MTN
83307	1-1-Food110-KF(3-R)-F	Aqueous	01/13/2023 06:48	01/16/2023 12:30	EPA-200.8 (DW)	WP MTN
83308	1-1-112-BF-F	Aqueous	01/13/2023 06:49	01/16/2023 12:30	EPA-200.8 (DW)	WP MTN
83309	1-1-115-BF-F	Aqueous	01/13/2023 06:50	01/16/2023 12:30	EPA-200.8 (DW)	WP MTN
83310	1-1-117-BF-F	Aqueous	01/13/2023 06:52	01/16/2023 12:30	EPA-200.8 (DW)	WP MTN
83311	1-1-119-BF-F	Aqueous	01/13/2023 06:54	01/16/2023 12:30	EPA-200.8 (DW)	WP MTN
83312	1-1-121-BF-F	Aqueous	01/13/2023 06:55	01/16/2023 12:30	EPA-200.8 (DW)	WP MTN



Analyzed

01/28/2023 10:56

Qualifiers

Summary of Detected Analytes

Project:	Prime Time Head Start at Thomas and Wils

Report Number:	23-013-0038			
Client Sample ID	Lab Sample ID			
Method	Parameters	Result	Units	Report Limit
1-1-Food110-KF(1)-	A 83297			
EPA-200.8 (DW)	Lead	0.723	µg/L	0.500
1-1-Food110-KF(3-I	A 83298			
		2.72		0 500

EPA-200.8 (DW)	Lead	2.72	µg/L	0.500	01/28/2023 10:58
1-1-Food110-KF(3-I	A 83299				
EPA-200.8 (DW)	Lead	7.16	µg/L	0.500	01/28/2023 10:59
1-1-121-BF-P	A 83304				
EPA-200.8 (DW)	Lead	1.68	µg/L	0.500	01/28/2023 11:22



Project	Prime Time Head Start at Thomas and	Report Number:
Information:		Report Date:

23-013-0038 1/30/2023

Sample Results

1-1-Food110-IM	Date Collected	01/13/2023 06:51	WPA Lab No	83296
	Date Received	01/16/2023 12:30	Matrix	Aqueous

EPA-200.8 (DW)

Prep Date	e	Prep Batch	Prep Method	Sample	Dilution	Analysis Date	Ву	Analytical	Batch
01/27/202	3 10:05	L659932	EPA-200.8	50 mL	1	1/28/2023 10:54:17	CPW	L661140	
CAS#	Paramo	eter			Result			MQL	Unit
7439-92-1	Lead				ND			0.500	μg/
-1-Food1	10-KF(1)-P	C	Date Collected	01/13/2023 06	:45 WPA Lab	No 8	3297	
			C	Date Received	01/16/2023 12	2:30 Matrix	Ad	queous	

EPA-200.8 (DW)

Prep Dat	te	Prep Batch	Prep Method	Sample	Dilution	Analysis Date	Ву	Analytical	Batch
01/27/20	23 10:05	L659932	EPA-200.8	50 mL	1	1/28/2023 10:56:11	CPW	L661140	
CAS#	Parame	eter			Result			MQL	Units
7439-92-1	Lead				0.723			0.500	µg/I
-1-Food1	.10-KF(3-L)-P	Dat	te Collected	01/13/2023 06	:46 WPA Lab	No 8	3298	
			Dat	te Received	01/16/2023 12	2:30 Matrix	Ac	queous	

EPA-200.8 (DW)

Prep Dat	te	Prep Batch	Prep Method	Sample	Dilution	Analysis Date	Ву	Analytical B	Batch
01/27/20	23 10:05	L659932	EPA-200.8	50 mL	1	1/28/2023 10:58:05	CPW	L661140	
AS#	Parame	ter			Result			MQL	Unit
A0#									

Qualifiers/ J Definitions MQL

Estimated value Method Quantitation Limit



Project	Prime Time Head Start at Thomas and	Report Number:	ź
Information:		Report Date:	1

23-013-0038 1/30/2023

Sample Results

1-1-Food110-KF(3-R)-P	Date Collected	01/13/2023 06:47	WPA Lab No	83299
	Date Received	01/16/2023 12:30	Matrix	Aqueous

EPA-200.8 (DW)

Prep Dat	е	Prep Batch	Prep Method	Sample	Dilution	Analysis Date	Ву	Analytical I	Batch
01/27/202	23 10:05	L659932	EPA-200.8	50 mL	1	1/28/2023 10:59:59	CPW	L661140	
CAS#	Parame	eter			Result			MQL	Units
7439-92-1	Lead				7.16			0.500	µg/I
-1-112-B	F-P		Da	te Collected	01/13/2023 06	:48 WPA Lab I	No 8	3300	
			Da	te Received	01/16/2023 12	2:30 Matrix	Ad	queous	

EPA-200.8 (DW)

Prep Dat	te	Prep Batch	Prep Method	Sample	Dilution	Analysis Date	Ву	Analytical Ba	itch
01/27/20	23 10:05	L659932	EPA-200.8	50 mL	1	1/28/2023 11:01:54	CPW	L661140	
CAS#	Parame	eter			Result			MQL	Units
7439-92-1	Lead				ND			0.500	µg/L
1-1-115-B	F-P			Date Collected	01/13/2023 06	:49 WPA Lab N	lo 8	3301	
				Date Received	01/16/2023 12	2:30 Matrix	Ac	queous	

EPA-200.8 (DW)

Prep Dat	e	Prep Batch	Prep Method	Sample	Dilution	Analysis Date	Ву	Analytical	Batch
01/27/202	23 10:05	L659932	EPA-200.8	50 mL	1	1/28/2023 11:03:49	CPW	L661140	
AS#	Parame	eter			Result			MQL	Unit

Qualifiers/ J Definitions MQL

Estimated value Method Quantitation Limit



Project	Prime Time Head Start at Thomas and '	Report Number:	23
Information:		Report Date:	1/

23-013-0038 /30/2023

Sample Results

1-1-117-BF-P	Date Collected	01/13/2023 06:52	WPA Lab No	83302
	Date Received	01/16/2023 12:30	Matrix	Aqueous

EPA-200.8 (DW)

Prep Date	e	Prep Batch	Prep Method	Sample	Dilution	Analysis Date	Ву	Analytical E	Batch
01/27/202	3 10:05	L659933	EPA-200.8	50 mL	1	1/28/2023 11:18:14	CPW	L661140	
CAS#	Parame	eter			Result			MQL	Unit
7439-92-1	Lead				ND			0.500	µg/
·1-119-BI	F-P		D	ate Collected	01/13/2023 06	:53 WPA Lab I	No 8	33303	
			D	ate Received	01/16/2023 12	2:30 Matrix	А	queous	

EPA-200.8 (DW)

Prep D	ate	Prep Batch	Prep Method	Sample	Dilution	Analysis Date	Ву	Analytical B	atch
01/27/2	2023 10:05	L659933	EPA-200.8	50 mL	1	1/28/2023 11:20:09	CPW	L661140	
CAS#	Parame	eter			Result			MQL	Units
7439-92-1	Lead				ND			0.500	µg/L
1-1-121-	BF-P		Da	ate Collected	01/13/2023 06	5:54 WPA Lab I	No 83	3304	
			Da	ate Received	01/16/2023 12	2:30 Matrix	Aq	ueous	

EPA-200.8 (DW)

Prep Date	2	Prep Batch	Prep Method	Sample	Dilution	Analysis Date	Ву	Analytical	Batch
01/27/2023	3 10:05	L659933	EPA-200.8	50 mL	1	1/28/2023 11:22:03	CPW	L661140	
AS#	Parame	eter			Result			MQL	Unit

Qualifiers/ J Definitions MQL

Estimated value Method Quantitation Limit



Project	Prime Time Head Start at Thomas and	Report Number:
Information:		Report Date:

23-013-0038 1/30/2023

Sample Results

1-1-Food110-KF(1)-F	Date Collected	01/13/2023 06:46	WPA Lab No	83305
	Date Received	01/16/2023 12:30	Matrix	Aqueous

EPA-200.8 (DW)

Prep Dat	e	Prep Batch	Prep Method	Sample	Dilution	Analysis Date	Ву	Analytical	Batch
01/27/202	3 10:05	L659933	EPA-200.8	50 mL	1	1/28/2023 11:23:58	CPW	L661140	
CAS#	Paramo	eter			Result			MQL	Unit
7439-92-1	Lead				ND			0.500	µg/
L-1-Food1	10-KF(3-L)-F	I	Date Collected	01/13/2023 06	:47 WPA Lab	No 8	3306	
			1	Date Received	01/16/2023 12	2:30 Matrix	Ac	queous	

EPA-200.8 (DW)

Prep Da	te	Prep Batch	Prep Method	Sample	Dilution	Analysis Date	Ву	Analytical	Batch
01/27/20	023 10:05	L659933	EPA-200.8	50 mL	1	1/28/2023 11:25:52	CPW	L661140	
CAS#	Parame	eter			Result			MQL	Units
7439-92-1	Lead				ND			0.500	µg/I
L-1-Food	L10-KF(3-R)-F	Da	te Collected	01/13/2023 06	5:48 WPA Lab I	No 83	3307	
			Da	te Received	01/16/2023 12	2:30 Matrix	Ac	lueous	

EPA-200.8 (DW)

Prep Dat	e	Prep Batch	Prep Method	Sample	Dilution	Analysis Date	Ву	Analytical	Batch
01/27/202	23 10:05	L659933	EPA-200.8	50 mL	1	1/28/2023 11:27:48	CPW	L661140	
AS#	Parame	eter			Result			MQL	Uni

Qualifiers/ J Definitions MQL

Estimated value Method Quantitation Limit



Project	Prime Time Head Start at Thomas and '	Report Number:	23
Information:		Report Date:	1/

23-013-0038 1/30/2023

Sample Results

1-1-112-BF-F	Date Collected	01/13/2023 06:49	WPA Lab No	83308
	Date Received	01/16/2023 12:30	Matrix	Aqueous

EPA-200.8 (DW)

Prep Date	e	Prep Batch	Prep Method	Sample	Dilution	Analysis Date	Ву	Analytical I	Batch
01/27/202	3 10:05	L659933	EPA-200.8	50 mL	1	1/28/2023 11:34:37	CPW	L661140	
CAS#	Paramo	eter			Result			MQL	Units
7439-92-1	Lead				ND			0.500	µg/I
·1-115-BI	F-F		D	ate Collected	01/13/2023 06	:50 WPA Lab	No 8	33309	
			D	ate Received	01/16/2023 12	2:30 Matrix	А	queous	

EPA-200.8 (DW)

Prep Da	ite	Prep Batch	Prep Method	Sample	Dilution	Analysis Date	Ву	Analytical B	atch
01/27/20	023 10:05	L659933	EPA-200.8	50 mL	1	1/28/2023 11:36:32	CPW	L661140	
CAS#	Paramo	eter			Result			MQL	Units
7439-92-1	Lead				ND			0.500	µg/L
1-1-117-6	BF-F		D	Date Collected	01/13/2023 06	5:52 WPA Lab I	No 8	3310	
			D	ate Received	01/16/2023 12	2:30 Matrix	Aq	lueous	

EPA-200.8 (DW)

Prep Date	2	Prep Batch	Prep Method	Sample	Dilution	Analysis Date	Ву	Analytical	Batch
01/27/202	3 10:05	L659933	EPA-200.8	50 mL	1	1/28/2023 11:38:26	CPW	L661140	
AS#	Parame	eter			Result			MQL	Unit

Qualifiers/ J Definitions MQL

Estimated value Method Quantitation Limit



Project	Prime Time Head Start at Thomas and	Report Number:	2
Information:		Report Date:	1,

23-013-0038 1/30/2023

Sample Results

1-1-119-BF-F	Date Collected	01/13/2023 06:54	WPA Lab No	83311
	Date Received	01/16/2023 12:30	Matrix	Aqueous

EPA-200.8 (DW)

Prep Dat	e	Prep Batch	Prep Method	Sample	Dilution	Analysis Date	Ву	Analytical	Batch
01/27/202	23 10:05	L659933	EPA-200.8	50 mL	1	1/28/2023 11:40:20	CPW	L661140	
CAS#	Paramo	eter			Result			MQL	Unit
7439-92-1	Lead				ND			0.500	µg/
-1-121-В	F-F		Da	ate Collected	01/13/2023 06	:55 WPA Lab I	No 83	3312	
			Da	ate Received	01/16/2023 12	2:30 Matrix	Aq	ueous	

EPA-200.8 (DW)

Prep Date		Prep Batch	Prep Method	Sample	Dilution	Analysis Date	Ву	Analytical Ba	tch
01/27/202	23 10:05	L659933	EPA-200.8	50 mL	1	1/28/2023 11:42:15	CPW	L661140	
CAS#	Parame	eter			Result			MQL	Un
439-92-1	Lead				ND			0.500	μ



Quality Control Data

Client ID:	Matrix New World	d Engineering					
Project Description:	Prime Time Head	Start at Thoma	as and Wilson				
Report No:	23-013-0038						
QC Prep:	L659932		QC Analytical	Batch(es):	L661140		
QC Prep Batch Method:	EPA-200.8		Analysis Meth Analysis Desci		EPA-200.8 (D Metals Analys	,	
Lab Reagent Blank		LRB-L659932	-	rix: AQU			
Associated Lab Samples:	83296, 83297, 832	98, 83299, 833	00, 83301				
Parameter	Units	Blank Result	MQL	An	alyzed		
Lead	µg/L	< 0.500	0.500	01/28	8/23 10:19		
Laboratory Control Sam	ple	LCS-L659932					
Parameter	Units	Spike Conc.	LCS Result	LCS	%Rec	% Rec Limits	
Lead	µg/L	50.0	49.0		98.0	85-115	
Matrix Spike & Matrix S	pike Duplicate	A 83301-MS-L	659932 A 83301-MSD	-L659932			

Parameter	Units	Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS %Rec	MSD %Rec	%Rec Limits	RPD	Max RPD
Lead	µg/L	< 0.505	50.5	50.5	49.2	49.0	97.0	96.0	70-130	0.4	20.0



Quality Control Data

Client ID:	Matrix New World	l Engineering					
Project Description:	Prime Time Head	Start at Thomas	and Wilson				
Report No:	23-013-0038						
QC Prep:	L659933		QC Analyti	cal Batch(es):	L661140		
QC Prep Batch Method:	EPA-200.8		Analysis M	ethod:	EPA-200.8 (DW)		
			Analysis D	escription:	Metals Analyses		
Lab Reagent Blank		LRB-L659933		Matrix: AQU			
Associated Lab Samples:	83302, 83303, 8330	04, 83305, 83306,	83307, 83308,	83309, 83310,	83311, 83312		
Parameter	Units	Blank Result	MQL	An	alyzed		
Lead	µg/L	< 0.500	0.500	01/2	8/23 11:07		
Laboratory Control Sam	ple	LCS-L659933					
Parameter	Units	Spike Conc.	LCS Result	LCS	5 %Rec	% Rec Limits	
Lead	µg/L	50.0	49.5		99.0	85-115	
Matrix Spike & Matrix S	pike Duplicate	L 93798-MS-L659	9933 L 93798-1	MSD-L659933			

Parameter	Units	Result	MS Spike Conc.	MSD Spike Conc.	MS Result	MSD Result	MS %Rec	MSD %Rec	%Rec Limits	RPD	Max RPD
Lead	µg/L	< 0.505	50.5	50.5	49.7	48.1	98.0	95.0	70-130	3.2	20.0



Shipment Receipt Form

Customer Number: 01312

Customer Name: Matrix New World Engineering

Report Number:	23-013-0038	5		
	Shippir	ng Method		
◯ Fed Ex	US Postal 💿 Lab		Other :	
	◯ Client ◯ Cour	ier	Thermometer ID:	
Shipping containe	er/cooler uncompromised?	• Yes	◯ No	
Number of cooler	s/boxes received	1		
Custody seals inta	act on shipping container/cooler?	⊖ Yes	◯ No	Not Present
Custody seals inta	act on sample bottles?	⊖ Yes	◯ No	Not Present
Chain of Custody	(COC) present?	• Yes	◯ No	
COC agrees with	sample label(s)?	Yes	◯ No	
COC properly cor	npleted	• Yes	◯ No	
Samples in prope	er containers?	Yes	◯ No	
Sample container	rs intact?	Yes	◯ No	
Sufficient sample	volume for indicated test(s)?	Yes	◯ No	
All samples receiv	ved within holding time?	Yes	◯ No	
Cooler temperatu	re in compliance?	Yes	◯ No	
	arrived at the laboratory on ice. nsidered acceptable as cooling Jn.	⊖ Yes	No	
Water - Sample c	ontainers properly preserved	Yes	◯ No	◯ N/A
Water - VOA vials	s free of headspace	⊖ Yes	◯ No	N/A
Trip Blanks receiv	ved with VOAs	⊖ Yes	◯ No	• N/A
Soil VOA method	5035 – compliance criteria met	◯ Yes	◯ No	• N/A
High concentr	ation container (48 hr)		w concentration EnCo	re samplers (48 hr)
High concentra	ation pre-weighed (methanol -14 d	d) 🗌 Lov	w conc pre-weighed vi	ials (Sod Bis -14 d)
Special precautio	ns or instructions included?	◯ Yes	No	
Comments:				

Signature: Christopher Monfort

Date & Time: 01/16/2023 12:30:00



5041 Taravella Road, Marrero, LA 70072 Main 504-371-8557 ° Fax 504-371-8560

www.waypointanalytical.com

 Kit ID:
 200120

 Initiated By:
 Amy Jackson

 Initiated Date:
 1/5/2023

 Project Comment

CHAIN-OF-CUSTODY



23-013-0038 01312 01-13-2023 16:04:31

Prime Time Head Start at Thomas and Wilson

Company N	lame		Company Number		Client I	Project I	Manager/Contact		Purchase	Order Number	
Matrix New	World Engine	ering	01312		Ms. Daw	n Brow	n				
Prime Time Head Start at Thomas and Wilson			Project Number	RUSH – Additional charges apply Special Detection Limits(s) Date Results Needed					Method of Shipment Fed Ex UPS USPS Courier Client Drop Off Other		
LIMS Proje	ct ID	Project Manager Phone		H	Project	Manag	er Email		Site/Faci	lity ID #	
		225-292-3271			dbrown	@mnwe	.com				
Date	Time		Sample ID	Matrix	Grab/ Comp	# of Cont	Container Type	Preservation		Analyses	
1/13/2023	6:51	1-1-Food	110-IM 83296	Aqueous		1	Plastic - 250ml	1000000	3 - Nitric Acid	200.8 - Lead in DW	
1	6195	1-1-Food	110-KF(1)-P 83297	Aqueous		1	Plastic - 250ml		3 - Nitric Acid	200.8 - Lead in DW	
	6146	1-1-Food	110-KF(3-L)-P 83298	Aqueous		1	Plastic - 250ml		3 - Nitric Acid	200.8 - Lead in DW	
			110-KF(3-R)-P 83299	Aqueous		1	Plastic - 250ml		3 - Nitric Acid	200.8 - Lead in DW	
	6:48	1- 1-1 12-8		Aqueous		1	Plastic - 250ml	1.510000000000	3 - Nitric Acid	200.8 - Lead in DW	
	6:49	1-1-115-B		Aqueous		1	Plastic - 250ml	0.0000	3 - Nitric Acid	200.8 - Lead in DW	
	Gisz	1-1-117-B		Aqueous		1	Plastic - 250ml		3 - Nitric Acid	200.8 - Lead in DW	
L.	6:53	1-1-119-B				1	Plastic - 250ml	HNO3 - Nitric Acid		200.8 - Lead in DW	

	For Laborato	ry Use Only	Sampled by (Name - Print)	Client I	Remark	s/Comments		
Ice	Custody	Lab Comments	Tristan Singletary					
	Seals		Relinquished by: (SIGNATURE)	Date	Time	Received by: (SIGNATURE)	Date	Time
¥/152	Y/NG		Ti hon	1-3-2	5 1250	Kathy Venerix oil	8/23	125.
			Relinquished by: (SIGNATURE)	Date	Time	Received by: (SIGNATURE)	Date // 6/2	Time
Blank/Co	oler Temp		Kathy Nendrix 01.	111/23	12:3	0/0/0		234
	NA		Relinquished by: (SIGNATURE)	Date	Time	Received by: (SIGNATURE)	Date	Time




5041 Taravella Road, Marrero, LA 70072 Main 504-371-8557 ° Fax 504-371-8560 www.waypointanalytical.com

Kit ID: 200120 Initiated By: Amy Jackson Initiated Date: 1/5/2023 Project Comment CHAIN-OF-CUSTODY

Company N	lame		Company Number		Client	Project	Manager/Contact		Purchase Order Number		
Matrix New	World Engine	ering	01312		Ms. Dav	vn Brow	'n				
Prime Time Head Start at Thomas and Wilson			Project Number	RUSH – Additional charges apply Special Detection Limits(s) Date Results Needed Project Manager Email					Method of Shipment Fed Ex UPS USPS Courier Client Drop Off Other		
			#	Project	t Manag	er Email	Site/Facil	lity ID #			
225-292-3271				dbrown	@mnwe	e.com					
Date	ate Time Sample ID		Matrix	Grab/ Comp	# of Cont	Container Type	Preservation		Analyses		
1/13/2023	6154	1-1-121-B	F-P 183304	Aqueous		1	Plastic - 250ml	HNO3 - Nitric Acid		200.8 - Lead in DW	
	6:46	1-1-Food1	110-KF(1)-F 83305	Aqueous		1	Plastic - 250ml	HNO3 - Nitric Acid		200.8 - Lead in DW	
			110-KF(3-L)-F83366	Aqueous		1	Plastic - 250ml	HNO3 - Nitric Acid		200.8 - Lead in DW	
	6:48	1-1-Food1	110-KF(3-R)-F 83307	Aqueous		1	Plastic - 250ml		3 - Nitric Acid	200.8 - Lead in DW	
	1	1-1-112-В		Aqueous		1	Plastic - 250ml		3 - Nitric Acid	200.8 - Lead in DW	
	6:so	1-1-1 1 5-B	F-F 83309	Aqueous		1	Plastic - 250ml		3 - Nitric Acid	200.8 - Lead in DW	
٢	6:52	1-1-117-B	F-F 83310	Aqueous		1	Plastic - 250ml		3 - Nitric Acid	200.8 - Lead in DW	
	Gist	SY 1-1-119-BF-F 83311		Aqueous		1	Plastic - 250ml		3 - Nitric Acid	200.8 - Lead in DW	

	For Laborato	ory Use Only	Sampled by (Name - Print)	Client Remark	s/Comments	
Ice	Custody	Lab Comments	Tristan singletani			
	Seals		Relinquished by: (SIGNATURE)	Date Time	Received by: (SIGNATURE)	Date Time
YR	Y/M		IN HOW	1-13-23 12:50	Kathy Hendric oil	8/23 1254
			Relinquished by: (SIGNATURE)	Date Time	Received by: (SIGNATURE)	Date / Time
Blank/Co	oler Temp		Kathy Nendrix	01/16/23 12	20 MM	1/16/23
d	JA		Relinquished by: (SIGNATURE)	Date Time	Received by: (SIGNATURE)	Date Time



5041 Taravella Road, Marrero, LA 70072 Main 504-371-8557 ° Fax 504-371-8560 www.waypointanalytical.com

 Kit ID:
 200120

 Initiated By:
 Amy Jackson

 Initiated Date:
 1/5/2023

 Project Comment

CHAIN-OF-CUSTODY

Company N	lame		Company Number			Client Project Manager/Contact				Purchase Order Number		
Matrix New	World Engine	ering	01312		Ms. Dawn Brown							
Site Name Prime Time Head Start at Thomas and Wilson		Thomas	Project Number	RUSH – Additional charges apply Special Detection Limits(s) Date Results Needed				Method of Shipment Fed Ex UPS USPS Courier Client Drop Off Other				
LIMS Proje	LIMS Project ID		Project Manager Pl	Project Manager Email				Site/Faci	lity ID #			
			225-292-3271		dbrown	@mnwe	e.com					
Date	Date Time Sample ID		Matrix	Grab/ Comp	# of Cont	Container Type	Pres	ervation	Analyses			
1/13/2023 G (55 1-1-121-E		BF-F 83312 Aqueous			1	Plastic - 250ml	HNO3 - Nitric Acid		200.8 - Lead in DW			

For Laboratory Use Only			Sampled by (Name - Print)	Client Remarks/Comments		
Ice	Custody	Lab Comments	Tristan Singleton	1		
	Seals		Relinquished by: (SIGNATURE)	Date Time	Received by: (SIGNATURE)	Date Time
¥/10	¥/19		(n'm	1-13-23 R150	Kachy Nendrin olli	3/23 1254
			Relinquished by: (SIGNATURE)	Date Time	Received by: (SIGNATURE)	Date, Time
Blank/Cooler Temp			Kathy Nerdix 0	116/23 12:	on M	1/16/27 1230
Ň	1		Relinquisted by: (SIGNATURE)	Date Time	Received by: (SIGNATURE)	Date Time



ATTACHMENT 2

ESTABLISHING ROUTINE PRACTICES

(Module 6 of EPA's 3Ts Manual)

Establishing Routine Practices

Schools and child care facilities should establish routine practices to reduce exposure to elevated lead levels and other environmental hazards (e.g., bacteria). These activities should not be conducted immediately prior to collecting a water sample but should be planned as part of the school's or child care facility's overall water management program to improve drinking water quality. Below are examples of routine activities that should be conducted to prevent exposure to drinking water contaminants:

Cleaning

- Clean drinking water fountains regularly. Consider posting a cleaning time card by the water fountains to allow the cleaning times to be recorded.
- Create an aerator (faucet screen) and water fountain strainer cleaning maintenance schedule and clean debris from all accessible aerators and strainers frequently. Establish a recordkeeping procedure to record when the aerators and strainers are cleaned.
- Consider setting a reminder on the calendar to notify the maintenance staff when it is time to clean the aerators and water fountain strainers.

Temperature Control

- Use only cold water for food and beverage preparation. Hot water will dissolve lead more quickly than cold water and may contain increased lead levels.
- If hot water is needed, it should be taken from the cold water faucet and heated on a stove or in a microwave oven. Consider creating notices that can be posted in the food and beverage preparation areas to remind students and staff to use cold water.

Point-of-Use Filter Maintenance

- If POU devices have been installed, make sure they are maintained. An example of a POU device is a filter on a faucet or within a drinking water fountain or water bottle filler.
- Ensure that the selected POU device is certified to remove lead (or any other contaminants of concern). To select a lead-reducing POU filter, check with the manufacturer or a third-party website (such as nsf.org or wqa.org) to verify the product was tested and certified against NSF/ANSI Standard 53 (for lead removal). For additional protection for particulate lead, look for a POU filter

Module 1

Module 2

Module 3

Module 4

Module 5

Module 6

Module 7

that is also certified against NSF/ANSI Standard 42 (for class I particulate reduction, 0.5 μ m to <1 μ m).

• Consider setting a reminder on the calendar when it is time to change the filter.

Cross-Connections Control

• Evaluate the facility for the presence of cross-connections (e.g., connections of nonpotable water to potable sources) and address any issues.

Communication

- Create and post placards near bathroom sinks with notices that water should not be consumed. As an example, indicate that a sink is a hand-washing only sink to prevent students and staff from misunderstanding and utilizing sinks for brushing teeth, washing food or other activities that ultimately result in water being consumed.
- Use pictures if there are small children using bathrooms.
- Consider organizing an event for the community to explain how everyone can help.

Routine Flushing Practices

- Regularly flush all water outlets used for drinking or food preparation, particularly after weekends and long vacations when water may have been stagnant for a long period of time.
- Flushing involves opening valves and faucets and letting the water run to remove water that has been standing in the interior pipes and/or the outlets. The

 Factsheet
 for more information.

 Image: Comparison of the second secon

See the Flushing Best Practices



flushing time varies by the type of outlet being cleared.

• Be careful not to flush too many outlets at once. This could dislodge sediments that might create further lead problems, or it could reduce pressure in the system below safe levels. If the flow from outlets is reduced noticeably during flushing, too many outlets have likely been turned on at once.

Module 1

Module 2

Module 3

Module 4

Module 5

Module 6

Module 7

TAKING ACTION

Flushing Directions by Outlet Type

Remember that each drinking water outlet should be flushed individually; flushing a toilet will not flush the water fountains. All flushing should be recorded in a log submitted to the individual in charge of this program.

Locate the faucet furthest away from the service line on each wing and floor of the building, open the faucets wide, and let the water run for 10 minutes. For best results, calculate the volume of the plumbing and the flow rate at the tap and adjust the flushing time accordingly. This 10-minute time-frame is considered adequate for most buildings.

Open valves at all drinking water fountains without refrigeration units and let the water run for roughly 30 seconds to one minute, or until cold.

Let the water run on all refrigerated water fountains for 15 minutes. Because of the long time period required, routinely flushing refrigerated fountains may not be feasible. It may therefore be necessary, and more economical, to replace these outlets with "lead-free" NSF-approved devices.

Open all kitchen faucets (and other faucets where water will be used for drinking and/or cooking) and let the water run for 30 seconds to one minute, or until cold.

Flushing is not recommended as a practical remedy for water coolers.



Communication Plan: Your continual effort to improve water quality in your facility will be of interest to parents, staff, and the community. Consider sending updates in newsletters.

Don't forget to maintain a record!

Record schedules for upkeep and maintenance and set calendar reminders to help you keep on schedule.



Module 1

Module 2

Module 3

Module 4

Module 5

Module 6

Module 7